


30A

Slip ring collector



 **INDUSTRIAL
POWER & CONTROL**
ENERGY SOLUTIONS FOR CRANES, HOISTS & MONORAILS

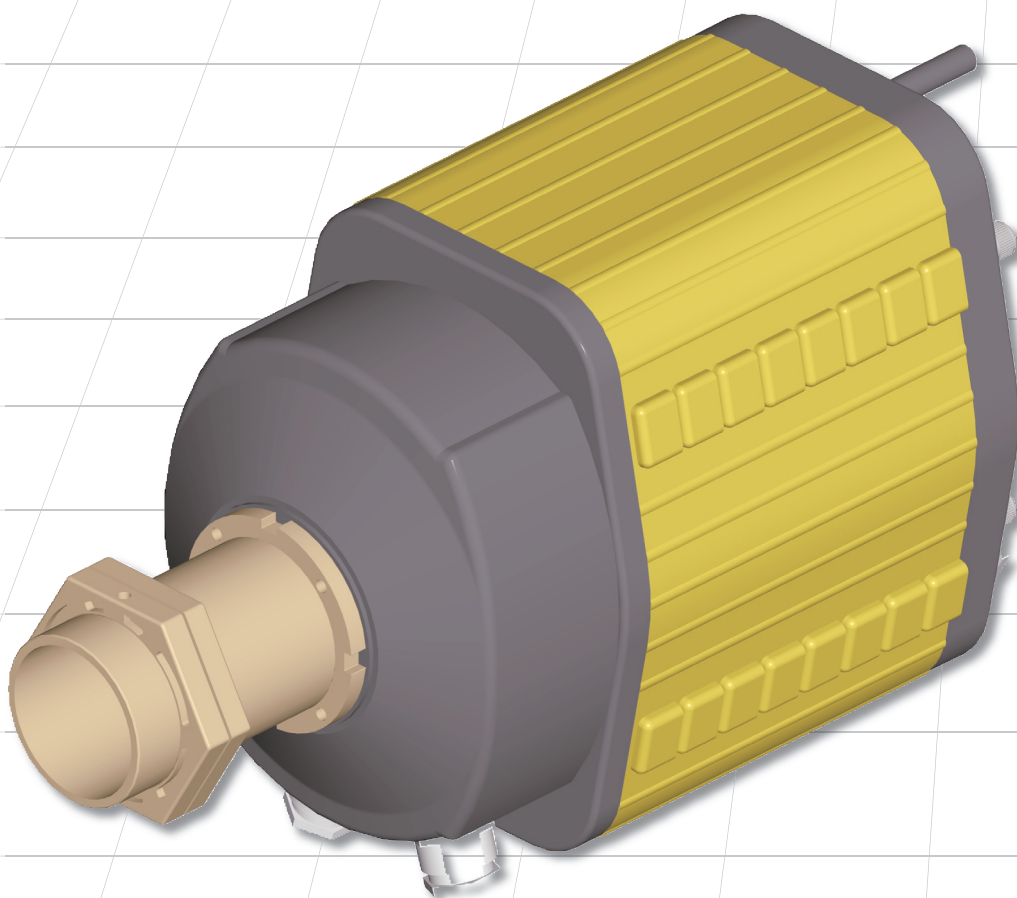


I N N O V A T I O N P A R T N E R

30A

Self-extinguishing plastic material and die-cast aluminium

Available with phosphor bronze or coal brushes

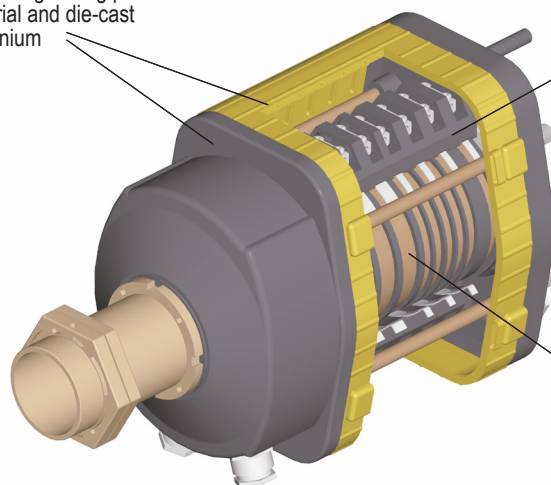


Available with 30A and 10A rings, up to 40 rings

Technical specifications

Operational temperature	-25°C / +70°C
Degree of protection	IP 22
Insulation category	Class I
Rated operational current	10 A / 30A
Rated operational voltage	400 Vac
Markings	CE

Overall dimensions

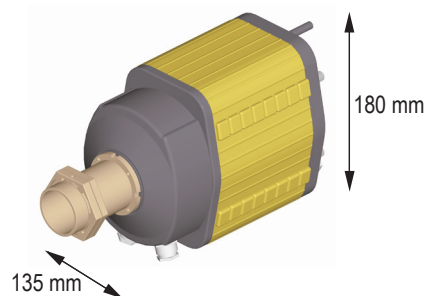

Product features

- Brass rings.
- Rotor unit rotating on ball bearing.
- Further information available on the technical documentation PRCA0EAE00.

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.